

# QUICK GUIDE



EGO TALK



Funkwerk Americas Inc.

8820 Kenamar Drive, Ste 506  
San Diego, CA 92121

Telephone +1 (858) 566 - 2159  
Fax +1 (858) 566 - 2179  
eMail support@egohandsfree.com  
Internet www.egohandsfree.com



A Funkwerk AG company

128 8011 1.05

Bluetooth QD ID B012812

## Welcome

This quick guide takes you through the initial setup of your EGO TALK. Please refer to your mobile phone operating instruction to familiarize yourself with its Bluetooth functions. Please check the EGO TALK phone supported list (available at [www.egohandsfree.com](http://www.egohandsfree.com)) to make sure your phone is compatible with the unit prior to installation. More information and detailed operating instructions can be found on our website at [www.egohandsfree.com](http://www.egohandsfree.com). If you have more questions, please visit [www.egohandsfree.com](http://www.egohandsfree.com) or call our support hotline +1 (858) 566-2170 [Mon - Fri, 8 AM to 5 PM (PST)].

## Package Contents

- Control unit
- Adhesive pad
- Command unit
- Microphone
- Wiring harness
- Adapter cable
- Quick guide (this document)
- Warranty registration

## Bluetooth hands-free pairing

1. Turn on your ignition
2. Search for Bluetooth devices with your mobile phone
3. Connect to the EGO TALK
4. Enter the pass key "0000" (if required)
5. Check that both, the red and green LED's are on. If not, delete all saved EGO TALK pairings from your mobile phone, turn off your ignition and start over.

## Bluetooth music pairing

1. Turn on your ignition
2. Search for Bluetooth devices with your Bluetooth music source (e.g. mp3 player or mobile phone)
3. Connect to the EGO TALK
4. Enter the pass key "0000" (if required)

Note: Some phones automatically pair the Bluetooth music connection during hands-free pairing.

## Support

Please refer to our comprehensive online user manual and other helpful tools available at our EGO website: [www.egohandsfree.com](http://www.egohandsfree.com).

## Support Desk

support@egohandsfree.com  
Support hours are Mon - Fri, 8 AM to 5 PM (PST).  
Support Hotline: +1 (858) 566 - 2170


## LED status indicators

Green LED blinks in 5 sec intervals > no device connected  
Green and Red permanently on > device is connected  
Only green on > music mode active  
Red on and green blinks > active call  
Green on and red off for a moment > music playback stopped

Button	Hands-free mode (green and red LED on)	Music mode (only green LED on)
	Answer a call Redial, privacy mode	Play Pause
	End a call Reject an incoming call	Stop
	Toggle between hands-free and music mode	
	Activate phone's voice commands*	Next track
		Previous track
	Volume up	
	Volume down	

\* Works only with voice activated mobile phones.

## Connection Concept

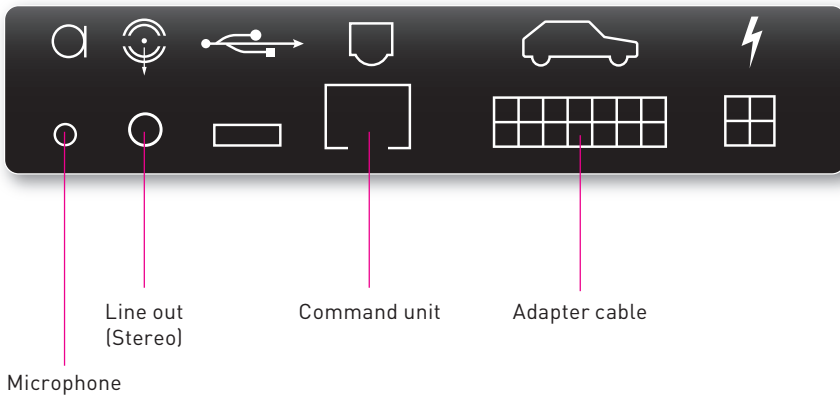

Pin	Color	Function
1	Brown	Ground
2	Yellow	Radio mute
3		
4		
5		
6	White	EGO audio input (+) from Radio or Amplifier
7	Purple	EGO audio output (+) to Speaker
8	Red	Battery +12 VDC
9	Blue	Ignition +12 VDC
10		
11		
12		
13	Black	EGO audio input (-) from Radio or Amplifier
14	Green	EGO audio output (-) to Speaker

View of the plug side, from which the wiring is fed in the plug housing (with pin allocation)

